

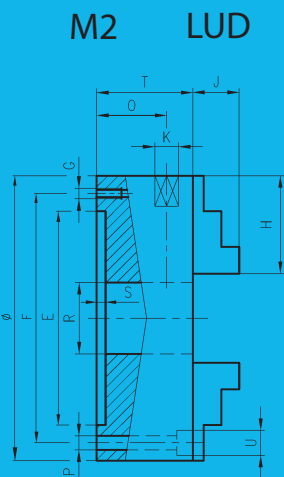


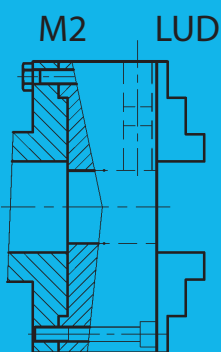

LUD – TYP 243807.0

Základní dodávka obsahuje:
 Grundausführung enthält:
 Basic delivery contains:
 Livraison de base contient:
 Основная поставка включает:












Max. moment M, max. upínací síla F, max. otáčky n
 Max. Drehmoment M, max. Spannkraft F, max. Drehzahl n
 Max. torque M, max. gripping force F, max. speeds n
 Moment maxi, force de serrage maxi, tours maxi
 Макс. момент, макс. зажимное усилие, макс. обороты

Ø			kg	Ø	M (Nm)	F (kN)	n (min ⁻¹)
85	M2	084020	1,60	85	10	20	4800
100	M2	104020	2,75	100	15	26	4200
125	M2	124020	4,85	125	22	36	3700
160	M2	164020	7,32	160	38	46	3000
200	M2	204020	15,42	200	54	74	2300
250	M2	254020	23,80	250	80	94	1700
315	M2	314020	44,50	315	94	126	1500
350	M2	354020	54,10	350	94	126	1300
400	M2	404020	57,50	400	94	126	1300

Ø	E H7	F±0,2	G	H	J	K	O	P	R	S	T	U
85	62	72	—	34	17	6	20	4×7	25	4	42	11
100	70	83	—	41	17	6	20	4×9	25	4	42	15
125	95	108	—	51	19	8	21	4×9	28	4	44	15
160	125	140	4×M10	47	22	8	32	4×11	45	4	54	17
200	125	140	4×M10	75	32	12	44	4×11	50	4	72	17
250	200	224	4×M12	75	32	12	44	4×13	60	5	72	20
315	200	224	4×M12	100	36	14	49	4×13	75	5	80	20
350	260	286	—	100	37	14	60	4×13	75	5	91	20
400	260	286	—	100	37	14	60	4×13	75	5	91	20

Lze objednat s přírubou typ 243830.0 v provedení:
 Es ist möglich mit Flansche Typ 243830.0 im Ausführung bestellen:
 Available to supply with the flange of the kind 243830.0, type:
 On peut commander le type 243830.0 avec la bride en modification:
 Можно заказать с фланцем тип 243830.0 в проведении:

A – DIN 55026; ISO 702/I; ČSN ISO 702/I
 B – DIN 55027; ISO 702/III; ČSN ISO 702/III
 D – DIN 55029 inch; ISO 702/II inch; ČSN ISO 702/II inch



Pro 3 a 4čelistní sklíčidla IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
Für 3 und 4-Backen Drehfutter IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
For 3 and 4-jaw chucks IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
Pour les mandrins à 3 et 4 mâchoires IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
Для 3 и 4-кулачковые патроны IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS

∅	E	F	G	H	J	K	L	N	O	P	R	S max.	T max.
80	3-27	—	23-48	48-73	—	—	3-27	27-51	52-76	—	—	98	—
100	3-39	3-45	24-60	58-94	25-67	60-102	3-39	30-66	64-100	42-72	77-107	122	130
125	3-49	3-47	30-75	70-116	28-74	69-115	3-49	38-84	83-125	50-95	90-136	152	163
160	3-76	3-76	46-119	87-160	35-108	91-166	3-76	50-123	91-164	51-128	109-185	208	218
200	5-88	5-83	56-140	116-200	46-125	105-185	5-88	57-140	117-200	69-148	127-207	246	254
250	5-107	5-125	68-162	156-250	60-183	124-247	5-107	66-168	154-256	83-206	147-270	314	328
315	8-136	8-131	74-201	188-315	65-193	145-273	8-131	79-207	193-321	99-225	174-305	392	382
400	10-187	10-187	90-268	223-400	105-282	173-350	10-187	92-274	224-406	118-290	189-358	498	454
500	25-250	25-250	135-360	275-500	135-411	201-477	25-250	135-360	275-500	125-447	191-513	626	579

Pro 6čelistní sklíčidla IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
Für 6-Backen Drehfutter IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
For 6-jaw chucks IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
Pour les mandrins à 6 mâchoires IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS
Для 6-кулачковые патроны IUS, IUZ, IUT, IUG, IUGO, IUH, IUHO, IUGG, IUGS, IUHG, IUHS

∅	E	F	G	H	J	K	L	N	O	P	R	S max.	T max.
125	3-43	3-41	30-69	70-110	28-68	69-109	3-43	38-78	83-119	50-89	90-130	146	157
160	3-70	3-70	46-113	87-154	35-102	91-160	3-70	50-117	91-158	51-122	109-179	202	212
200	5-80	5-75	56-132	116-192	46-117	105-177	5-80	57-132	109-200	69-140	127-199	238	246
250	5-99	5-117	68-154	156-242	60-185	124-237	5-99	66-160	154-248	83-198	147-262	306	320
315	8-126	8-121	74-191	188-305	65-183	145-263	8-121	79-197	193-311	99-215	179-295	372	372
400	10-175	10-175	90-256	223-388	105-270	173-338	10-175	95-262	224-394	118-278	189-346	486	442
500	25-238	25-238	135-348	275-488	135-399	201-465	25-238	135-348	275-488	125-435	191-501	614	567

Pro sklíčidla IUD, IUM
Für Drehfutter IUD, IUM
For chucks IUD, IUM
Pour les mandrins IUD, IUM
Для патронов IUD, IUM

Pro monoblokovou čelist MC
Für ungestufte Backe MC
For solid soft jaw MC
Pour la mâchoire monobloc MC
Для полусырого кулачка M

Pro nástavec měkký NM
Für weiche Aufsatzbacke NM
For top soft jaw NM
Pour l'allonge molle NM
Для мягкого накладного кулачка NM

∅	E max.	F max.	∅	E max.	F max.	G max.	G max.
100	129	29	80	98	24	—	—
125	160	40	100	122	36	133	31
160	216	66	125	152	46	167	39
200	269	79	160	208	72	208	54
250	333	93	200	246	84	254	78
315	407	127	250	314	104	331	119
400	507	177	315	392	144	373	125
500	636	226	400	498	192	459	181
			500	626	256	584	240